

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 25/40, BPR 25/40 D



Robust and reliable
Best component protection



Precise and save to operate
Comfortable control lever



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in m3

BPR 25/40 0,385


BPR 25/40 D 0,432

Standard Equipment

- ☒ Protective engine covering
- ☒ Comfortable control lever
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level (BPR25/40)
- ☒ Automatic decompression (BPR25/40D)
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+13kg)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Transport wheels, puncture-proof (+4kg)
- ☐ Service Kit
- ☐ US Version EPA 4 NRTC (BPR25/40D)

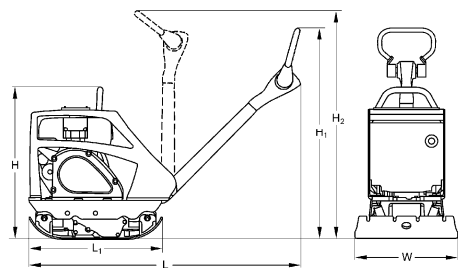

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 25/40	660	930	1080	1460	650	400
BPR 25/40 D	740	930	1080	1460	650	400

Technical Data

		BOMAG BPR 25/40	BOMAG BPR 25/40 D
Weights			
Operating weight CECE (W)	kg	135	150
Basic weight	kg	132	147
Dimensions			
Basic working width	mm	400	400
Lowest passing height	mm	660	740
Min. height w. steering in top position	mm	930	930
Max. height w. steering in top position	mm	1.250	1.250
Driving Characteristics			
Working speed, max.	m/min	25	25
Max. gradeability (dep. on soil con.)	%	30	30
Drive			
Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		Stage V / CARB P.	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	kW	3,6	
Performance ISO 3046	kW		3,1
Speed	min-1	3.600	3.000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	1,1	0,7
Exciter system			
Frequency	Hz	85	85
Centrifugal force	kN	25	25
Amplitude	mm	1,55	1,55
Capacities			
Fuel	l	3,1	3,0
Water	l	12,0	12,0

Technical modifications reserved. Machines may be shown with options.



PRE 692 65 010

240523 Sa05

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

