

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 60/65, BPR 60/65 D



No breakage of paving stones



No damage to installations and borders



Large footprint for large formats

Shipping dimensions in m3

BPR 60/65 0,932


BPR 60/65 D 0,979

Standard Equipment

- ☒ STONEGUARD Special base plate
- ☒ Engine protection hood
- ☒ Comfortable control lever
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Automatic decompression
- ☒ Multi-functional, foldable single-point lifting facility
- ☒ Extension plates (650mm)
- ☒ Electric starter
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Warning signal at low oil level (BPR55/65D)
- ☒ Hour meter
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Tool kit
- ☐ Special painting
- ☐ Service Kit
- ☐ US Version
(BPR60/65D: 6,8kW)

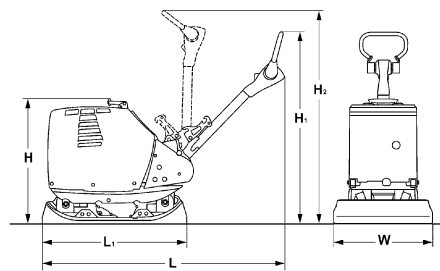

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 60/65	790	990	1360	1735	970	680
BPR 60/65 D	830	990	1360	1735	970	680

Technical Data

		BOMAG BPR 60/65	BOMAG BPR 60/65 D
Weights			
Operating weight CECE (W)	kg	447	487
Basic weight	kg	442	484
Dimensions			
Basic working width	mm	680	680
Lowest passing height	mm	790	830
Min. height w. steering in top position	mm	990	990
Max. height w. steering in top position	mm	1.230	1.230
Driving Characteristics			
Working speed, max.	m/min	25	25
Max. gradeability (dep. on soil con.)	%	35	35
Drive			
Engine manufacturer		Honda	Hatz
Type		GX 390	1B 40
Emission stage		CARB PHASE 3	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	kW	8,7	
Performance ISO 3046	kW		6,7
Speed	min-1	3.600	3.000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	3,5	1,5
Exciter system			
Frequency	Hz	68	68
Centrifugal force	kN	60	60
Amplitude	mm	1,96	1,96
Capacities			
Fuel	l	6,1	5,0

Technical modifications reserved. Machines may be shown with options.



PRE 692 81 010

240523 Sa04

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

